


Standard Duty Steel Strapping

| Code | Width | | Thickness | | Average Strength | | Length/Weight | | Average Coil Weight | |
|----------|--------|------|-----------|------|------------------|-------|---------------|------|---------------------|-------|
| | inches | mm | inches | mm | lbs | (N) | ft/lbs | m/kg | lbs | (kg) |
| STD3815 | 3/8 | 10 | 0.015 | 0.38 | 675 | 3000 | 52.3 | 35.2 | 100-105 | 45-47 |
| STD3820 | 3/8 | 10 | 0.020 | 0.51 | 900 | 4000 | 39.2 | 26.4 | 100-105 | 45-47 |
| STD1215 | 1/2 | 12.7 | 0.015 | 0.38 | 900 | 4000 | 39.2 | 26.4 | 100-105 | 45-47 |
| STD1220 | 1/2 | 12.7 | 0.020 | 0.51 | 1200 | 5340 | 29.4 | 19.8 | 100-105 | 45-47 |
| STD1223 | 1/2 | 12.7 | 0.023 | 0.58 | 1380 | 6140 | 25.6 | 17.2 | 100-105 | 45-47 |
| STD5815 | 5/8 | 15.9 | 0.015 | 0.38 | 1125 | 5000 | 31.4 | 21.2 | 100-105 | 45-47 |
| STD5818 | 5/8 | 15.9 | 0.018 | 0.46 | 1375 | 6115 | 26.2 | 17.6 | 100-105 | 45-47 |
| STD5820 | 5/8 | 15.9 | 0.020 | 0.51 | 1500 | 6670 | 23.5 | 15.9 | 100-105 | 45-47 |
| STD5823 | 5/8 | 15.9 | 0.023 | 0.58 | 1725 | 7670 | 20.5 | 13.8 | 100-105 | 45-47 |
| STD3415 | 3/4 | 19.0 | 0.015 | 0.38 | 1350 | 6000 | 26.1 | 17.6 | 100-105 | 45-47 |
| STD3418 | 3/4 | 19.0 | 0.018 | 0.46 | 1620 | 7200 | 21.8 | 14.6 | 100-105 | 45-47 |
| STD3420 | 3/4 | 19.0 | 0.020 | 0.51 | 1800 | 8000 | 19.6 | 13.2 | 100-105 | 45-47 |
| STD3423 | 3/4 | 19.0 | 0.023 | 0.58 | 2070 | 9200 | 17.1 | 11.5 | 100-105 | 45-47 |
| STD3428 | 3/4 | 19.0 | 0.028 | 0.71 | 2400 | 10675 | 14 | 9.4 | 100-105 | 45-47 |
| STD11431 | 1-1/4 | 32 | 0.031 | 0.79 | 5500 | 24449 | 7.6 | 5.1 | 100-105 | 45-47 |

Other sizes & strength available

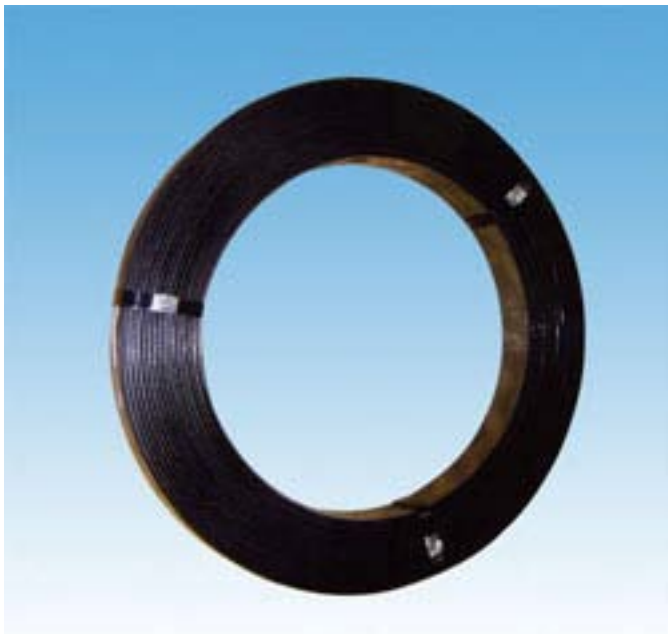

Standard Duty Steel Strapping



Zinc Plated Strapping