



PIPE CLAMPS

DOUBLE BOLT PIPE CLAMP P525 & P525Z

Surface Finish: P 525: Plain, Black; P525Z: Electro-Plated Zinc

Industrial pipe hanger for hot service with up to 4" of insulation and where flexibility at rod attachment is desired


Load bolt will extend past 4" of insulation on pipe sizes 6" and larger

Normally used in conjunction with a #40 Eye Rod or a #35 Forged Steel Eye Nut

Complies with Manufacturers' Standardization (MSS) SP-58 and SP-69 (Type 3)

Material: Low carbon steel, available in stainless steel to order, specify 304, 316

Ordering: Specify pipe size and figure number

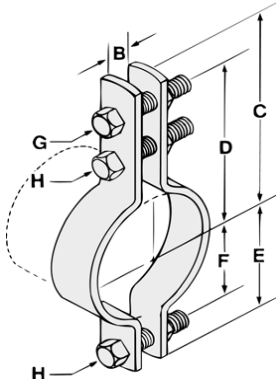


Pipe Size (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	Bolt Size (inch)		Material Size (inch)	Max. Rec. Load/lbs		Wt. Each (in lbs)
						G	H		650 F Degree	750 F Degree	
3/4	5/8	3 ⁷ /16	2 ¹³ /16	2	1 ³ /8	3/8	3/8	7ga X 1-1/4	950	850	0.83
1	5/8	3 ¹ /2	2 ⁷ /8	2	1 ³ /8	3/8	3/8	7ga X 1-1/4	950	850	1.02
1 ¹ /4	5/8	3 ⁹ /16	2 ¹⁵ /16	2 ¹ /16	1 ⁷ /16	3/8	3/8	7ga X 1-1/4	950	850	1.07
1 ¹ /2	1	5 ¹ /4	4 ⁵ /8	2 ⁵ /8	2	5/8	1/2	3ga X 1-1/4	1545	1380	2.30
2	1	5 ³ /8	4 ³ /4	2 ³ /4	2 ¹ /8	5/8	1/2	3ga X 1-1/4	1545	1380	2.60
2 ¹ /2	1	5 ¹¹ /16	5 ¹ /16	3 ¹ /16	2 ⁷ /16	5/8	1/2	3ga X 1-1/4	1545	1380	2.71
3	1	6	5 ³ /8	3 ³ /8	2 ³ /4	5/8	1/2	3ga X 1-1/4	1545	1380	3.03
3 ¹ /2	1	6 ⁵ /16	5 ¹¹ /16	3 ¹¹ /16	3 ¹ /16	5/8	1/2	3ga X 1-1/4	1545	1380	3.28
4	1	8 ¹ /16	7 ¹ /16	5 ¹ /16	4 ¹ /16	3/4	5/8	3/8 X 2	2500	2230	6.67
5	1	8 ⁵ /8	7 ⁵ /8	5 ⁵ /8	4 ⁵ /8	3/4	5/8	3/8 X 2	2500	2230	7.05
6	1 ¹ /2	9 ⁷ /8	8 ⁵ /8	6 ³ /8	5 ¹ /8	7/8	3/4	3/8 X 2-1/2	2865	2555	11.45
8	1 ¹ /2	11 ¹ /8	9 ⁷ /8	7 ⁵ /8	6 ³ /8	7/8	3/4	3/8 X 2-1/2	2865	2555	13.15
10	1 ¹ /2	12 ³ /8	11 ¹ /8	8 ⁷ /8	7 ⁵ /8	1	7/8	1/2 X 2-1/2	3240	2890	19.80
12	1 ¹ /2	13 ³ /4	12 ¹ /2	10 ¹ /4	9	1	7/8	1/2 X 2-1/2	3240	2890	22.25
14	1 ¹ /2	15 ¹ /16	13 ⁹ /16	11 ⁷ /16	9 ¹⁵ /16	1 ¹ /4	7/8	5/8 X 3	4300	3835	37.68
16	1 ¹ /2	15 ¹³ /16	14 ⁵ /16	12 ³ /16	10 ¹¹ /16	1 ¹ /4	7/8	5/8 X 3	4300	3835	41.40
18	1 ¹ /2	16 ¹¹ /16	15 ⁷ /16	13 ⁵ /16	11 ¹³ /16	1 ¹ /4	1	5/8 X 3	4300	3835	44.87
20	2	18	16 ¹ /2	14 ¹ /2	13	1 ³ /8	1 ¹ /8	3/4 X 3	5490	4900	57.25
24	2	20 ¹ /4	18 ³ /4	16 ³ /4	15 ¹ /4	1 ³ /8	1 ¹ /4	3/4 X 3	4500	4015	65.90
30	2 ¹ /4	26	23	22	19	1 ³ /8	1 ¹ /4	3/4 X 5	8000	---	195.02
36	2 ¹ /2	32-3/8	28-7/8	25-5/8	22-1/8	1 ³ /8	13/8	1 X 5	8000	---	234.88



PIPE CLAMPS

HEAVY DUTY DOUBLE BOLT PIPE CLAMP P526 & P526Z

Surface Finish: P 526: Plain, Black; P526Z: Electro-Plated Zinc
 Industrial pipe hanger for hot service with up to 4" of insulation and where flexibility at rod
 Load bolt will extend past 4" of insulation on pipe sizes 6" and larger
 Normally used in conjunction with a #40 Eye Rod or a #35 Forged Steel Eye Nut
 Complies with Manufacturers' Standardization (MSS) SP-58 and SP-69 (Type 3)
 Material: Low carbon steel, available in stainless steel to order, specify 304, 316
 Ordering: Specify pipe size and figure number

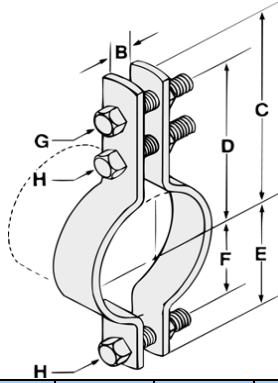

Pipe Size (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	Bolt Size (inch)		Material Size (inch)	Max. Rec. Load/lbs		Wt. Each (in lbs)
						G	H		650 F Degree	750 F Degree	
6	1 ³ / ₄	11 ¹ / ₈	8 ⁷ / ₈	6 ¹ / ₁₆	4 ³ / ₁₆	1	⁷ / ₈	3/8 x 2-1/2	3500	3125	14.14
8	2	11 ³ / ₁₆	9 ¹⁵ / ₁₆	7 ⁷ / ₁₆	6 ³ / ₁₆	1 ¹ / ₈	1	1/2 x 2-1/2	4800	4285	20.99
10	2 ¹ / ₄	12 ¹⁵ / ₁₆	11 ³ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	1 ¹ / ₄	1 ¹ / ₈	1/2 x 3-1/2	5500	4910	33.71
12	2 ¹ / ₂	14	12 ¹ / ₄	10 ¹¹ / ₁₆	8 ¹⁵ / ₁₆	1 ¹ / ₂	1 ¹ / ₄	5/8 x 3-1/2	7000	6250	48.17
14	2 ¹ / ₂	15 ¹ / ₈	13 ¹ / ₁₆	12	10	1 ¹ / ₂	1 ¹ / ₄	3/4 x 4	9500	8485	70.50
16	3	16 ¹³ / ₁₆	14 ⁹ / ₁₆	13 ⁷ / ₁₆	11 ³ / ₁₆	1 ³ / ₄	1 ¹ / ₂	3/4 x 4-1/2	10000	8930	93.90
18	3 ¹ / ₂	18 ¹³ / ₁₆	16 ⁵ / ₁₆	15 ⁵ / ₁₆	12 ¹³ / ₁₆	2	1 ³ / ₄	1 x 4	13800	12325	123.72
20	3 ¹ / ₂	19 ¹⁵ / ₁₆	17 ⁷ / ₁₆	16 ⁷ / ₁₆	13 ¹⁵ / ₁₆	2	1 ³ / ₄	1 x 5	15300	13665	156.43
24	3 ¹ / ₂	22 ¹ / ₂	19 ¹ / ₂	19	16	2	1 ³ / ₄	1 x 6	16300	14555	204.65